


Rugged. Reliable. Ready for use.

Honeywell has a complete family of hazardous area limit switches tailored to exact specifications for superior performance, extended productivity and increased safety.

Reduce operational and maintenance costs with Honeywell's hazardous area limit switches. Reliable and robust, these flexible switches are designed for a wide range of industrial applications, from mud pumps, valve positioning and pig position detectors to gate/door monitoring, conveyors and many more. Count on Honeywell for global support, exceptional quality, and innovative design and technology.



Designed to endure the toughest applications

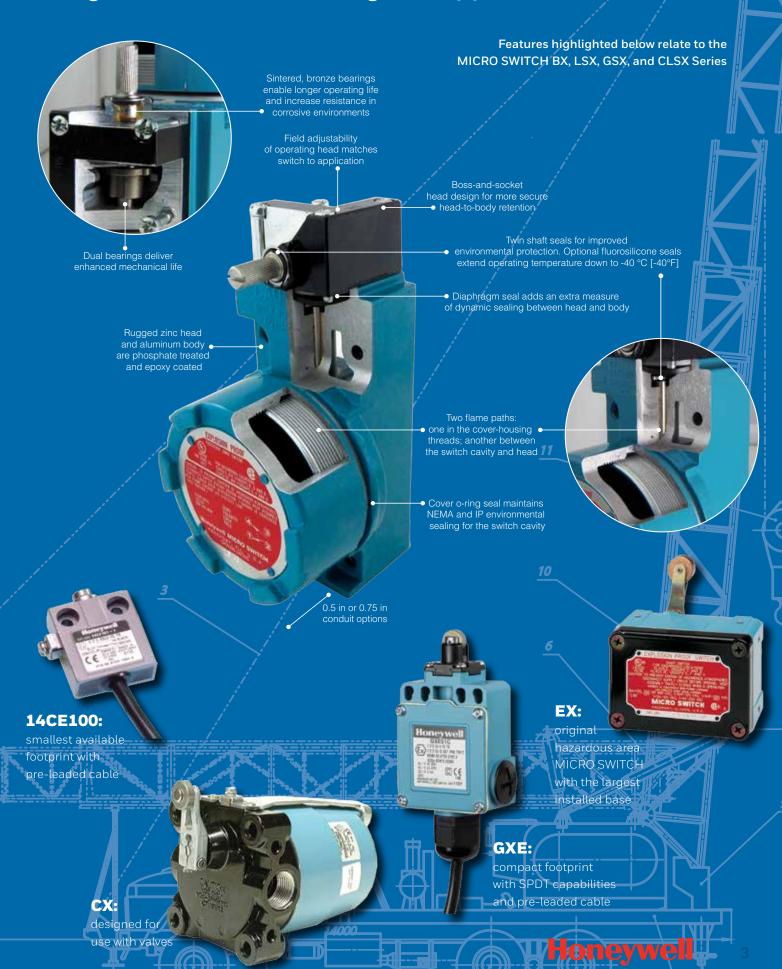

Hazardous Area Switches | BX, BX2, LSX, GSX, CLSX Series



BX Series

A global history of rugged performance in explosive environments and a broad portfolio of options to meet your needs













- Choice of aluminum or stainless steel housings for use in non-corrosive and corrosive environments
- Designed for use in the toughest climates (-40°C to 70°C [-40°F to 158°F])
- Silver contacts available for switching power loads and gold contacts for switching low-power loads
- Mounting pattern is interchangeable with the iconic HDLS MICRO SWITCH platform
- Multiple actuator & switching combinations are available



I SX Series

Weather-sealed product for operation in explosive environments in North America





- Silver contacts available for switching power loads and gold contacts for switching low-power loads
- Mounting pattern is interchangeable with the iconic HDLS MICRO SWITCH platform
- Optional availability for use in low temperatures (-40°C [-40°F])
- Multiple actuator & switching combinations are available



GSX Series

Combines proven MICRO SWITCH global safety limit switch product with an explosion-proof design to create a hazardous area safety switch











- Designed to ensure that even welded contacts will open and machine will stop in emergency situations
- SIL 3 rating for use in safety applications
- Switching contacts with positive break
- Optional gold contacts for switching low-power load
- For use on gates, cages, panels, and other applications requiring a machine to stop in an emergency



CLSX Series

Cable-pull switch designed for emergency stop protection in explosive environments





- Cable lengths may be 200 ft in straight line
- Positive opening of normally closed (NC) contacts
- For use with conveyors, perimeter guarding and more



APPLICATIONS

- Control valves and actuators
- Gate position detection
- Grain handling equipment
- Mining conveyors
- Mud pumps
- Offshore drilling
- Oil and gas drilling rigs
- Paint booths
- Pulp and paper coating
- Valve position monitoring
- Waste treatment



MICRO SWITCH Hazardous Area Switches | BX, BX2, and LSX Series

| BX | | F | | 3K | | | - | V |
|--------------------------------|---|---|-----------------|---|--|--|-----------|--|
| | | | | Body/Basic | | Actuator | | Actuator |
| Switch Type | Conduit Threads | Head Style* | | Switch Code | | Modification | | Options |
| BX Series Aluminum | ½ or ¾ NPT** | A * Side rotary; momentary | 1A | 3NC/1NO, slow acting, 3/4 -14 NPT | 1 | CW rotation | 1A | Fixed Ø 0.75 in x 0.25 in W nylon roller, 1.5 in radius, front mount |
| Hazardous Area | 4 20 mm | B Top rotary; momentary | 1E | 3NC/1NO, slow acting, 3/4-14 NPT gold-plated contacts | 2 | CCW rotation | 1C | back mount |
| Limit Switch | ** see Body/Basic Switch Code column | C * Top pin plunger, momentary | 3E | 1NC/1NO, snap action, 1/2 -14 NPT gold-plated contacts | 3 | Right-oriented actuator head assembly | 2A | Adjustable, Ø 0.75 in x 0.25 in W nylon roller. front mount |
| BX2 Series Stainless | NOTE: if 1/2 NPT or 3/4 NPT conduit is desired, no code is | D * Top roller plunger, momentary | 3K | 1NC/1NO, snap action, 1/2 - 14 NPT | 4 | Left-oriented actuator head assembly | 2C | back mount |
| Steel Hazardous | necessary. Leave- blank. | E * Side pin plunger; momentary | ⁴4K | 1NC/1NO, snap action, 3/4 - 14 NPT | 5 | Head assembled with actuator to mounting surface | 2J | Adjustable, Ø 1.0 in x 0.5 in W nylon roller, front mount |
| Area Limit Switch | If conduit code "4" in this column is selected, conduit in Body/Basic Switch column does not apply. | F * Side roller plunger; momentary | 4L | 2NC/2NO, snap action, 3/4 - 14 NPT | 6 | Roller perpendicular to mounting surface | 2K | back mount |
| | | H* Side rotary, momentary; low PT, low torque | 4M | 2NC/2NO, snap action, sequential, 3/4 - 14 NPT | 8 | Roller parallel to mounting surface | 35 | Yoke, Ø 0.75 in x 0.25 in W nylon rollers, same side, back mount |
| | | J Wobble stick | 4N | 2NC/2NO, snap action, center neutral, 3/4 - 14 NPT | | | 4M | Hub rod, aluminum |
| | | K Cat whisker | 45 | 2NC/2NO, snap action, 3/4-14 NPT gold-plated contacts | | | 5A | Offset, Ø 0.75 in x 0.25 in W nylon roller, back mount |
| TI. | | * Side rotary; sequential, momentary | 4T | 2NC/2NO, snap action, sequential, 3/4 -14 NPT, gold-plated contacts | | | 5C | Offset, Ø 0.75 in x 0.25 in W nylon roller, front mount |
| all | - | * Side rotary; central neutral, momentary | 4U | 2NC/2NO, snap action, center neutral, 3/4 -14 NPT, gold-plated contacts | | | 7A | Plastic wobble stick |
| | | N * Side rotary; maintained | 7 L | 2NC/2NO, snap action, 1/2 - 14 NPT | | | 8A | Cat whisker, 5.5 in |
| | 4 | P * Side rotary, momentary; low PT and DT | [∆] 7N | 2NC/2NO, snap action, center neutral, 1/2 - 14 NPT | To | order high temperatu | re vers | ions insert the |
| | | 0.1 | Λ | 2NC/2NO, snap action. | To order high temperature versions, insert the | | | 10113, 111301 C C110 |

2NC/2NO, snap action,

2NC/2NO, snap action, sequential,1/2 -14 NPT, gold-plated contacts

2NC/2NO, snap action, center neutral, 1/2 -14 NPT, gold-plated contacts

BXA3K

BXYAC3K

gold-plated contacts

1/2 -14 NPT

 Δ Not available with conduit code 4.

Side pin plunger, adjustable, momentary

R * Side rotary, momentary;

Top pin plunger, adjustable, momentary

low torque

Levers for Side Rotary Actuated Switches

| Code | Catalog Listing | Material | Roller Dia. (in) | Roller Width (in) | Roller Mounting | | | | |
|----------------------|------------------------------------|------------|---------------------|----------------------|--------------------|--|--|--|--|
| Fixed 1 | Fixed 1.5 inch radius | | | | | | | | |
| 1 | | Rollerless | n/a | n/a | n/a | | | | |
| 1A | LSZ51A | Nylon | 0.75 | 0.25 | Front | | | | |
| 1C | LSZ51C | Nylon | 0.75 | 0.25 | Back | | | | |
| Adjusta | Adjustable 1.5 in to 3.5 in radius | | | | | | | | |
| 2 | | Rollerless | n/a | n/a | n/a | | | | |
| 2A | LSZ52A | Nylon | 0.75 | 0.25 | Back | | | | |
| 2C | LSZ52C | Nylon | 0.75 | 0.25 | Front | | | | |
| 2J | LSZ52J | Nylon | 1.0 | 0.50 | Front | | | | |
| 2K | LSZ52K | Nylon | 1.5 | 0.25 | Front | | | | |
| Yoke – 1.5 in radius | | | | | | | | | |
| 3E | LSZ53E | Nylon | 0.75 | 0.25 | Back/ Front | | | | |
| 3M | LSZ53M | Nylon | 0.75 | 1.25 | Back/ Front | | | | |

| Code | Catalog Listing | Material | Roller Dia. (in) | Roller Width (in) | Roller Mounting | | |
|-----------------------------|--------------------|------------------|---------------------|----------------------|--------------------|--|--|
| 3S | LSZ53S | Nylon | 0.75 | 0.25 | Front/ Front | | |
| Rod | | | | | | | |
| 4 | | Hub only | n/a | n/a | n/a | | |
| 4M | LSZ54M | Alum, 5.5 in | n/a | n/a | n/a | | |
| Offset – 1.5 in radius | | | | | | | |
| 5 | | Rollerless | n/a | n/a | n/a | | |
| 5A | LSZ55A | Nylon | 0.75 | 0.25 | Back | | |
| 5C | LSZ55C | Nylon | 0.75 | 0.25 | Front | | |
| Wobble stick | | | | | | | |
| 7A | LSZ1JGA | Delrin™ rod, 5.5 | n/a | n/a | n/a | | |
| Short fixed - 1.3 in radius | | | | | | | |
| 9A | LSZ59A | Nylon | 0.75 | 0.25 | Front | | |
| 9C | LSZ59C | Nylon | 0.75 | 0.25 | Back | | |


additional letters \boldsymbol{Y} and \boldsymbol{C} in the appropriate places in

standard, side-rotary plug-in switch

completely FC-sealed version of

the standard catalog listing, as shown below:

^{*} BX2 stainless steel "head styles" and "actuators" available

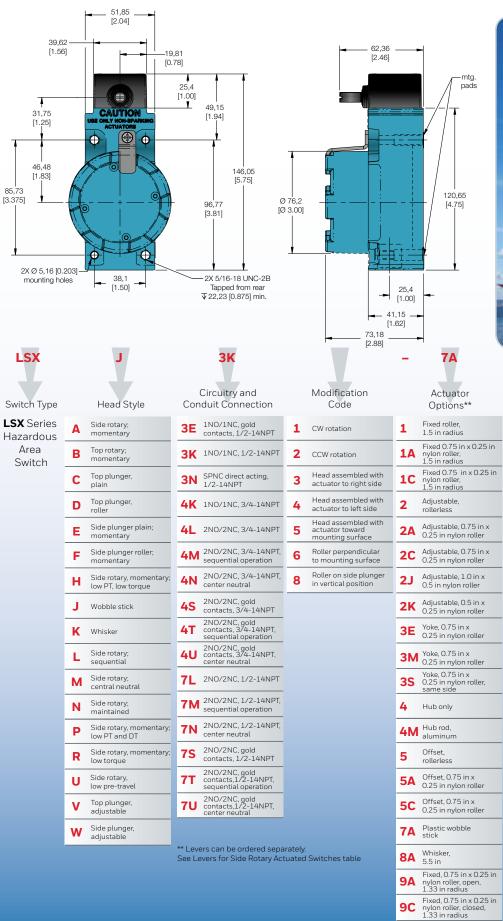



Honeywell MICRO SWITCH BX Series and LSX have consistent dimensions

Not all combinations available. Please contact Honeywell for assistance.

To order high temperature versions, insert the additional letters **Y** and **C** in the appropriate places in the standard catalog listing, as shown below:


| in switch | de-rotary plug- |
|---------------------------------|-----------------------|
| LSXYAC3K completely sion of LSX | FC-sealed ver- A3K |


To order low temperature versions, insert the additional letters \mathbf{Y} and \mathbf{B} in the appropriate places in the standard catalog listing, as shown below:

| LSXA3K | standard, side-rotary plug- in switch | | | | |
|----------------------------|--|--|--|--|--|
| LSX <u>Y</u> A <u>B</u> 3K | low-temperature version of LSXA3K | | | | |

MICRO SWITCH Hazardous Area Switches | GSX Series




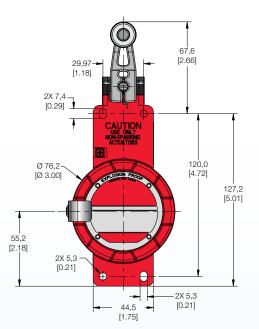

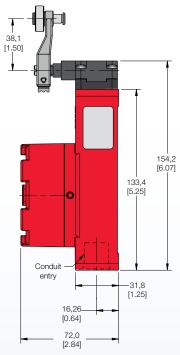





47

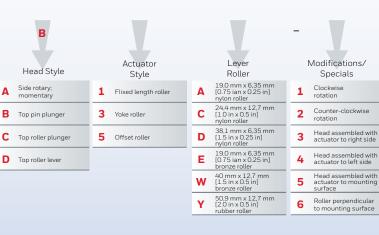

MICRO SWITCH Hazardous Area Switches | CLSX Series



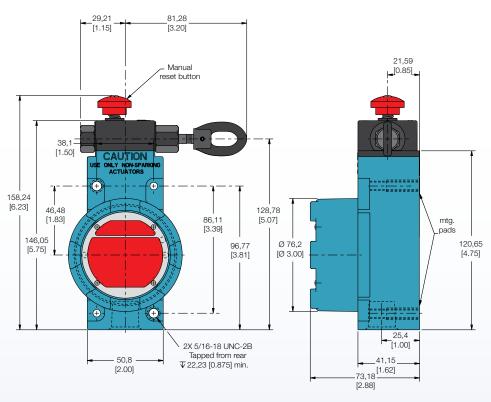

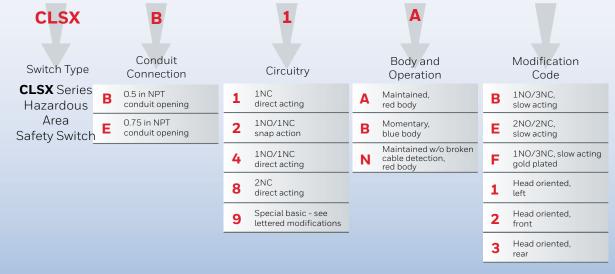

Hazardous Area Switches | CX, EX, 14CE100, GXE Series



CX Series

Weather-sealed, explosion-proof switch designed for outdoor use in hazardous atmospheres









- Ability to monitor quarter-turn and linear valve position
- Automates existing, non-automated valves
- Pin plunger and side-rotary versions
- Hermetically sealed elements available
- Housing available in short and standard lengths
- Available with analog 4 mA to 20 mA output and/or discrete switching capabilities
- Optional gold contacts for switching low-power load
- Up to six NC and six NO contacts



EX Series

The original hazardous area MICRO SWITCH with the largest installed base









- Mounts from any of four sides
- Hermetically sealed elements available
- Option for two conduit openings
- Variety of levers and actuators
- Optional gold contacts for switching low-power load
- High temperature versions available (204°C [400°F])



14CE100 Series

Gang-mounting capability adds to application design flexibility for smaller machines and instruments



- Use where limited space is available
- Available with pin and roller plunger actuators
- Pre-leaded to minimize installation and procurement costs
- Optional gold contacts for switching low-power load



APPLICATIONS

- Control valves and actuators
- Gate position detection
- Grain handling equipment
- Mining conveyors
- Mud pumps
- Offshore drilling
- Oil and gas drilling rigs
- Paint booths
- Pulp and paper coating
- Valve position monitoring
- Waste treatment



GXS Series

Compact, pre-leaded switch with DIN-sized body









- EN 50047 mounting compatible (GXE Series)
- EN 50041 mounting compatible (GXA Series)
- Double insulated switch cavity provides a second layer of electrical circuit protection
- Pre-wired; variety of heads, levers, and actuators
- Compact footprint for use where space is limited









| UL, CSA, [ATEX (CE), IEC Ex, IN METRO (select models)] | UL, CSA, ATEX (CE), IEC Ex | Agency Approvals | ATEX (CE) | ATEX (CE), IEC Ex |
|---|---|---------------------------|---|--|
| NEMA 7 (Gas): Class I, Div.1 & Div. 2, Groups B (14CX, 16CX, 24CX, 26CX, 36CX only), C, and D; NEMA 9 (Dust): Class II, Div.1 & Div. 2, Groups E, F, and G ATEX/IEC Ex, INMETRO (Gas) II 2 G; Exd IIC T6 ATEX/IEC Ex, INMETRO (Dust) II 2 D; Exd tD A21 T85°C | NEMA 7 (Gas): Div. 1 & 2, Class I, Groups <u>B</u> , C, & D (select models) NEMA 9 (Dust): Div. 1 & 2, Class II, Groups E, F, & G II 2 G; EEx d IIB + H2 T6 | Hazardous Designations | II 2 G; Ex d IIC T6 II 2 D; Ex tD A21 T85°C | II 2 G; EEx d IIC T6 II 2 D; Ex tD A21 T85°C |
| NEMA 1, 3, 4, 4X, 6, 6P, and 13; IP66 | NEMA 1 | Sealing | IP65, (IP66/IP67 boot sealed plungers) | IP66/67 |
| aluminum epoxy coated, bronze | aluminum, epoxy coated | Housing Material | zinc, epoxy coated | zinc, epoxy coated |
| side rotary (choice of levers), side rotary (with flat shaft), plunger actuator | side rotary, top pin plunger, top roller plunger, manual | Actuators/Levers | top pin plunger, top roller plunger, cross-roller plunger | side rotary, top pin plunger, top roller plunger |
| 3/4 - 14 NPT, M25 x 1,5 mm conduit | 1/2 in - 14NPT conduit, lead wires | Termination | cable (various lengths) | 5 m cable |
| 1NC 1NO SPDT, 2NC 2NO DPDT, 6NC 6NO, 4 mA to 20 mA analog output, 4NC 4NO | 1NC 1NO SPDT snap action, 1NC 1NO SPDT maintained, 2NC 2NO DPDT snap action | Circuitry | 1NC 1NO SPDT snap action | 1NC 1NO SPDT snap action |
| -25°C to 85°C [-13°F to 185°F] -40°C [-40°F] optional | -40°C to 71°C [-40°F to 160°F] | Operating Temp. | 0°C to 70°C [32°F to 158°F] | -20°C to 75°C [-4°F to 167°F] |
| 1 A, 10 A, 15 A, 20 A | 1 A, 3 A, 10 A, 15 A, 20 A | Amp Rating | 1 A (thermal), 5 A (thermal) | 5 A (thermal) |
| 120 Vac, 240 Vac, 480 Vac, 28 Vdc, 125 Vdc, 250 Vdc | 125 Vac, 250 Vac, 480 Vac, 125 Vdc, 250 Vdc | Voltage | AC14 D300 DC13 R300 | AC15, 4 A 250 V DC13, 0.15 A 250 V |
| external and internal | external and internal | Grounding screw | external and internal (ground wire provided) | none, double insulated |
| | | | | |



MICRO SWITCH Hazardous Area Switches | EX Series

MICRO SWITCH EX Series Listings

| Catalog Listing | Actuation Type | Actuation | Contact | Electrical Rating* | Other | |
|--|---|--------------------------|-------------|-----------------------|--------------------------------|--|
| EX-AR | Roller Lever | Clockwise | SPDT | А | | |
| EX-AR20 | Side Rotary | Clockwise | SPDT | А | No lever furnished | |
| EX-AR230 | Side Rotary | Counter Clockwise | SPDT | А | | |
| EXA-AR20 | Side Rotary | Clockwise | SPDT | В | | |
| EX-AR30 | Roller Lever | Counter Clockwise | SPDT | Α | | |
| EX-AR800 | Roller Lever | Clockwise | SPDT | Α | Class 1 / Group B | |
| EX-AR830 | Roller Lever | Counter Clockwise | SPDT | А | Class 1 / Group B | |
| EXHT-AR | Roller Lever | Clockwise | SPDT | С | High temperature 204°C [400°F] | |
| EXA-AR | Roller Lever | Clockwise | SPDT | В | | |
| EXA-AR62 | Roller Lever | Clockwise | SPDT | В | No mounting bracket | |
| EX-AR182 | Roller Lever | Clockwise | SPDT | А | Nylon roller | |
| EX-AR141 | Roller Lever | Clockwise | SPDT | А | No mounting bracket | |
| EX-Q | Top Pin Plunger | - | SPDT | А | | |
| EX-Q62 | Top Pin Plunger | - | SPDT | А | No mounting bracket | |
| EXA-Q | Top Pin Plunger – SPDT B Low operating force | | | | | |
| EXHT-Q | Top Pin Plunger – SPDT C High temperature 204°C [400°F] | | | | | |
| *Electrical Ratings | | | | | | |
| A UL/CSA Rating: 15 A, 125 Vac, 250 Vac or 480 Vac; 1/8 HP, 125 Vac; 1/4 HP, 250 Vac; 1/2 amp, 125 Vdc; 1/4 amp, 250 Vdc | | | | | | |
| В | UL/CSA Rating: 20 A, 125 Vac, 250 Vac or 480 Vac; 10 A, 125 Vac "L"; 1 HP, 125 Vac; 2 HP, 250 Vac; 1/2 amp, 125 Vdc; 1/4 amp, 250 Vdc | | | | | |
| С | UL/CSA Rating: 3 A, 125 Vac or 250 Vac; 1/10 HP, 125 Vac; 1/6 HP 250 Vac | | | | | |
| Additional options a | nd configurations of | this product are availal | ole. Please | contact Hon | eywell for more information. | |

© 8,38 [Ø 0.33]


47,21 [1.859]

O EXPLOSION PROOF SWITCH O

O CAT. UST.


92,96 [3.66]

MICRO SWITCH Hazardous Area Switches | CX Series

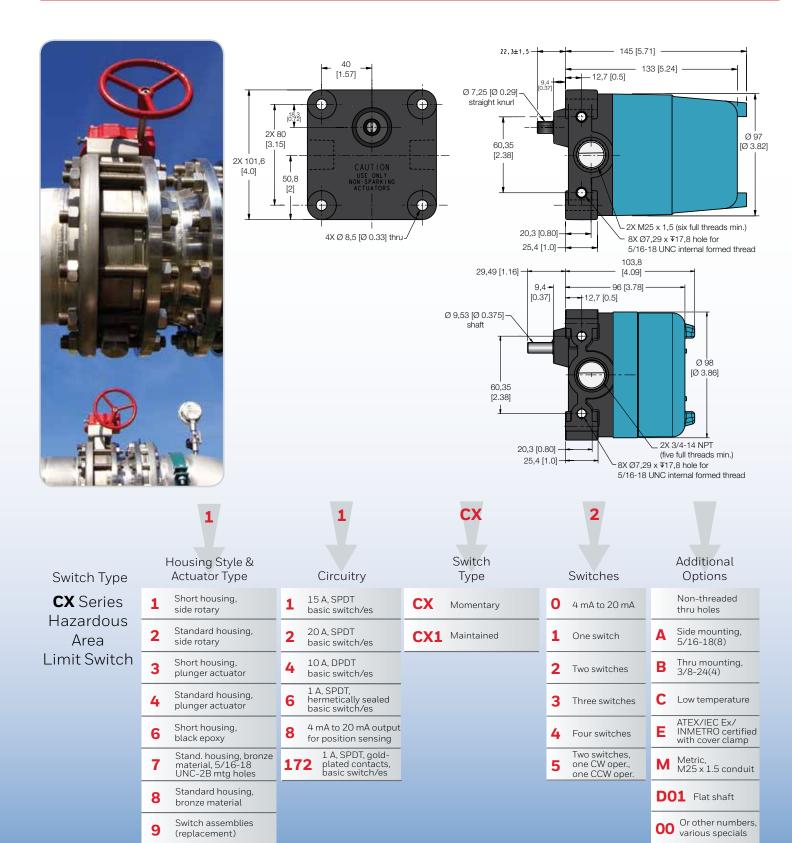



Other special configurations may be available. For more information, contact your Honeywell representative.

MICRO SWITCH Hazardous Area Switches | GXA/GXE Series

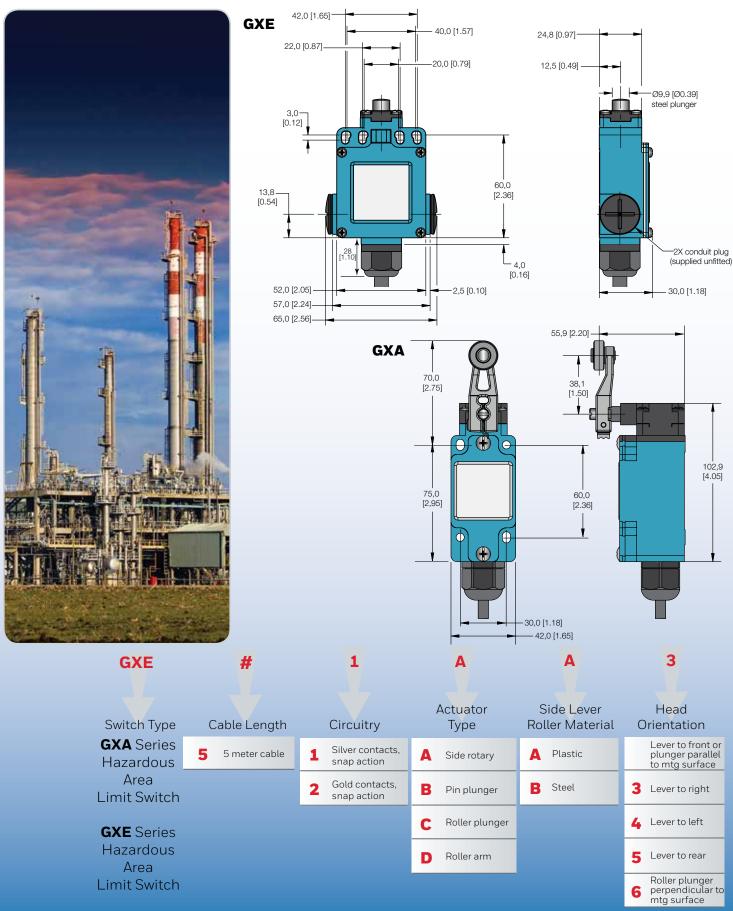

MICRO SWITCH Hazardous Area Switches | 14CE100 Series

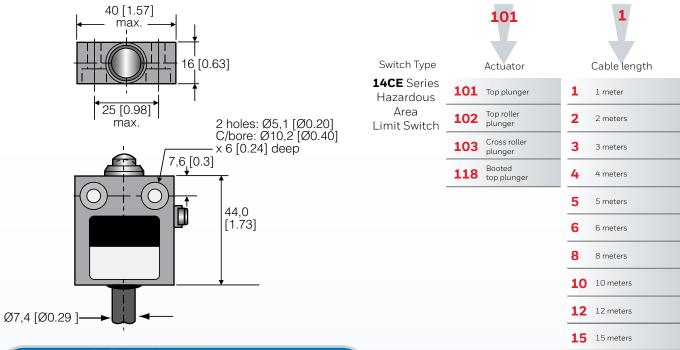

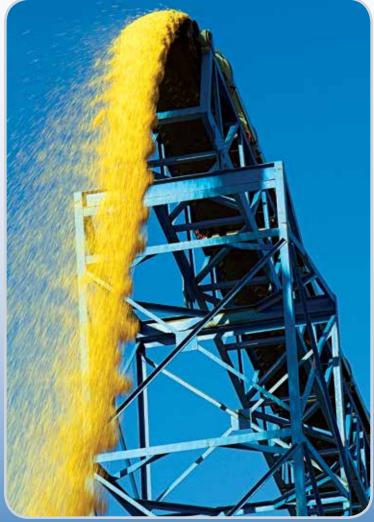



VPX Series

Valve position indicator designed for outdoor use in hazardous atmospheres









- Certified for ATEX, IEC Ex, CE, and cULus specifications for global applications that requires protection from explosive gases, vapors & combustible dust
 - coming soon: NEPSI and KOSHA certifications
- Die-cast aluminum housing and various sealing (NEMA 4, 4X, 6, and 13), certifies the VPX Series is rated for rain, wind, snow, ice and blowing dust environments
- Wide operating temperature range from -40°C to 80°C
- Versions of the VPX with proximity switches carry an Intrinsically Safe (IS) rating
- Well suited for up to 500,000 actuation cycles
- Available in multiple indicator colors that is visible from all directions



| _ | _ | | | |
|--------|----|----|-----|-----|
| Agency | Λr | nr | 01/ | alc |
| | | | | |

cULus, ATEX, IEC EX, CE

Explosion Proof Hazardous Area Designations

North America: Division 1, Class I, Groups B, C, and D (Gas Rating) Division 1, Class II, Groups E, F, and G (Dust Rating) ATEX/IEC Ex:

II 2 G, II 2 D (ATEX Rating) Ex db IIC T6 Gb (Gas Rating) Ex tb IIIC T85°C Db (Dust Rating)

Ta -40°C to +50°C (Switch Code 4A or 4B)

Ta -40°C to +60°C (Switch Code 2A or 2B)

Intrinsically Safe **Hazardous Area** Designations

VPX with proximity switches carry an intrinsically safe rating:

North America: Not Available

ATFX/IFC Fx:

II 1 G, II 1 D (ATEX Rating) Ex ia IIC T4 Ga (Gas Rating) Ex ia IIIC T135°C Da (Dust Rating)

Ta -40°C to 80°C

Sealing

NEMA 4, 4X, 6, and 13 per UL 50E;

IP66 per IEC 60079-0; IP67 per IEC 60529 (self-certified by Honeywell)

Housing Material

aluminum with protective paint finish

Visual Indicator

available in multiple colors and angles. Visible from all directions.

Operating Temp.


versions with four electromechanical switches: -40°C to 50°C [-40°F to 122°F] versions with two electromechanical switches: -40°C to 60°C [-40°F to 140°F] versions with proximity switches: -40°C to $80^{\circ}\text{C}\,[\text{-}40^{\circ}\text{F}\,\text{to}\,176^{\circ}\text{F}]$

versions with snap-action switches: UL Rating: 15 A 150 Vac CE Rating: 16 A 250 Vac 10 A 250 Vac 0.5 A 250 Vdc

0.5 A 250 Vdc


Electrical Rating

versions with intrinsically safe proximity switches: switch element function: NAMUR, NC nominal voltage: 8.2 V current consumption (On) ≤ 1 mA current consumption (Off) ≥ 3 mA

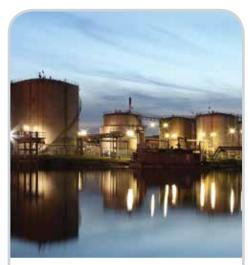



APPLICATIONS

- Seaside grain and duel loading docks
- Oil and gas wells
- Refineries
- Fuel storage facilities
- Mining
- Petrochemical and chemical plants
- Waste water treatment facilities
- Oil and gas production pipeline networks
- Paint batching/blending plants
- Pharmaceuticals and drug processing plants
- Food and beverage industries
- Pesticides manufacturing plants
- Textile dyeing and finishing plants
- Lead acid battery manufacturing facilities

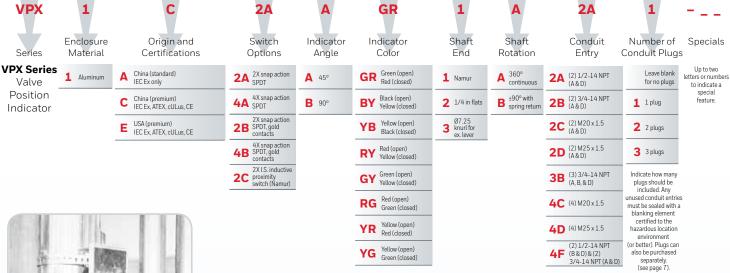



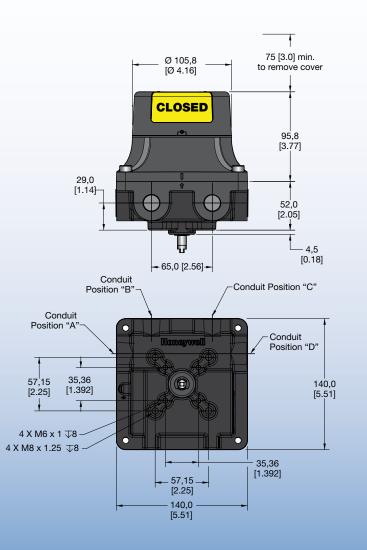





There's an advantage for taking the bold step. For seeing the possibilities. And seizing the opportunity.

At Honeywell, we work hard to lead the way. To develop technologies that are ahead of the curve. To deliver solutions that anticipate your needs. And sometimes that innovative mindset allows you to be the market leader. That's why MICRO SWITCH switches are the leading electromechanical switch brand on the market.

And you can rest assured, Honeywell switches are the right product at the right time to help you maximize efficiency and minimize cost. Because it's a Honeywell product, backed by world-class service and support.

Part Innovation. Part Engineering. Total Solutions.

MICRO SWITCH Hazardous Area Switches

- BX/BX2
- 1 SX
- CX
- EX
- VPX
- GXE | GXA
- 14CE100

Potential Applications

- Control valves
- Conveyors and grain elevators
- Maintenance equipment
- Material handling
- Off-shore drilling
- Paint booths
- Petrochemical and waste treatment plants
- Pipeline valves

Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is customer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

Find out more

To learn more about Honeywell's sensing and switch products, call +1-815-235-6847, email inquiries to info.sc@honeywell.com, or visit sensing.honeywell.com

Honeywell Sensing and Internet of Things

9680 Old Bailes Road Fort Mill, SC 29707 honeywell.com

