

SUMMARY

Wires

Low	0
High	1
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	3S
Termination type	HV contact
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	FFB.3S.410.CTAC10
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	ERA*: Fixed receptacle, nut fixing
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	3S.410 : 1 High Voltage
Insulator	T: PTFE
Rated Current	10 Amps

Specifications


Contact Type:	Solder
Test voltage (kV DC)	15
Test voltage (kV AC)	10.5
Creepage dist.(mm):	16.5

Others

Endurance (Shell): 5000 mating cycles
 Temp (min / max): -55°C / +250°C
 Humidity (max): <=95% [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Salt Spray Corrosion: >1000 hr
 Climatical Category: 50/175/21
 Shielding (min): 75 dB (10 MHz)
 Shielding (min): 40 dB (1 GHz)
 IP Rating: 50

DRAWINGS

Draws

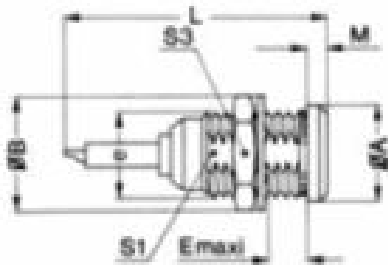

Dimensions

	A	B	E	L	M	S1	S3	e
mm.	22	25.2	11.5	52	2	16.5	22	M18x1.0
in.	0,87	0,99	0,45	2,05	0,08	0,65	0,87	

RECOMMENDED BY LEMO

Tools

None

Cables